

dametric 

K-TVD2S25

VAL0190383




CABLE TVD-T1 / TVD-T2 / TVD-T2S / TVD-T3B / TVD-T3T
DESCRIPTION

Valmet 

1 Specification

Length	25 m
Connector	62GB-4-KAF
4-lead cable	LIYCY-CY 4*0.25
Protection	Flexible steel tube the first 3 meter from the connector

2 Connection diagram

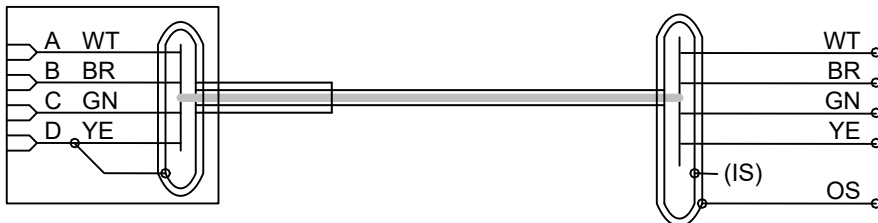

WT = white, BR = brown, GN = green, YE = yellow, IS = inner shield, OS = outer shield.

3 Installation.

Cut the inner shield and isolate it from the outer shield.

Connect the outer shield to a ground bar close to the RMS rack.

4 Contact

Sales, development, production and service:

Dametric AB

Jägerhorns Väg 19, 141 75 Kungens Kurva, Sweden

Phone: +46-8 556 477 00

E-mail: service@dametric.se

Web site: www.dametric.se

dametric 

Valmet 